

HTW

QUALITY COMFORT EVERYWHERE

OFFICE RANGE


3 AÑOS
GARANTÍA
TOTAL
COMPROMISO DE CALIDAD

5 AÑOS
GARANTÍA
COMPRESOR
COMPROMISO DE CALIDAD

A++
SEER

A+
SCOP

A+++
SCOP
Warmer

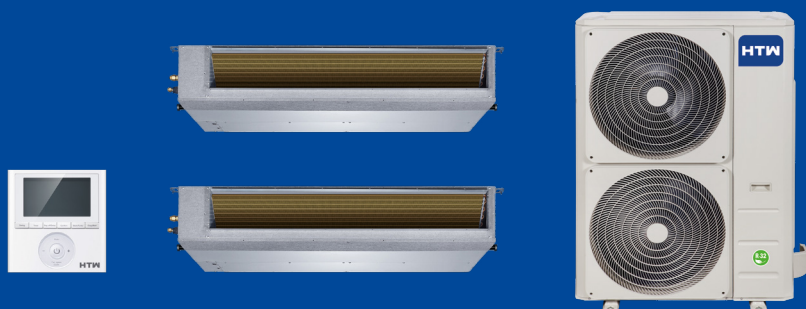

TWIN DUCTS ADMIRA



UP TO **160 Pa**

WiFi
OPTIONAL

DC
inverter

GOLDEN FIN
protection

Voice control

Reduced height

ON
OFF
On/Off contact
and alarm

Condensate
pump

Wired control
with weekly
programming

Double return
position

Large installation
length

Google Home

			HTW-2D035ADMR32	HTW-2D052ADMR32	HTW-2D071ADMR32T3	HTW-2D090ADMR32T3
MODELS	IU		HTW-DI-035ADMR32	HTW-DI-052ADMR32	HTW-DI-071ADMR32	HTW-DI-090ADMR32
	OU		HTW-UO-071ADMR32	HTW-UO-105ADMR32	HTW-UOT3-140ADMR32	HTW-UOT3-160ADMR32
	EAN CODE		8435483839793	8435483839779	8435483836556	8435483836549
Power Supply / Connection	V, P, Hz		220~240V (1 Phase ~ 50Hz) (indoor)			380~415V (3 Phase ~ 50Hz)
PERFORMANCE						
Cooling capacity	kW		3,52 (0,53~3,99)	5,28 (2,55~5,86)	7,03 (3,28~8,16)	8,79 (2,23~9,85)
	Btu/h		12.000 (1.800~13.607)	18.000 (8.700~20.000)	24.000 (11.180~27.830)	30.000 (7.600~33.600)
Heating capacity	kW		3,81 (1,00~4,39)	5,57 (2,20~6,15)	7,62 (2,81~8,49)	9,38 (2,70~10,02)
	Btu/h		13.000 (3.400~14.975)	19.000 (7.500~21.000)	26.000 (9.580~28.954)	32.000 (9.200~34.200)
FEATURES						
Indoor unit	Sound power	dB(A)	57	58	61	66
	Sound pressure	dB(A)	34,5/30,5/29/23	41/38/34/26	42/40/37/27	52,5/49/47
	Air flow	m³/h	600/480/300	911/706,3/515,2	1.229/1.035/825,1	2.600/2.210/1.820
Outdoor unit	Sound power	dB(A)	61	65	66	74
	Sound pressure	dB(A)	53,6	55,5	63,5	63
	Air flow	m³/h	3.500	4.000	7.500	7.500
Selectable temperature range	°C		16~30	16~30	16~30	16~30
Refrigerant	Type/Charge	R32/Kg	1,5	2,4	2,9	3
	Additional charge >5	g/m	24	24	24	24
DIMENSIONS AND WEIGHT						
Indoor unit	Net dimensions (W×H×D)	mm	700x200x506	800x210x674	1.100x774x249	1.200x300x874
	Net weight	Kg	17,8	24,4	32,3	47,4
Outdoor unit	Net dimensions (W×H×D)	mm	890x673x342	946x810x410	1.200x874x300	952x1.333x415
	Net weight	Kg	43,9	66,9	47,6	107
CONNECTIONS						
Refrigerant tube	Liquid - Gas	in.	3/8" - 5/8"	3/8" - 5/8"	3/8" - 5/8"	3/8" - 5/8"
	Max. length	m	50	75	50	75
	Max. unevenness	m	25	30	25	30
Electric connections	Outdoor Power Supply	mm	(2+T)x2,5	(2+T)x4	(4+T)x2,5	(4+T)x2,5
	Interconnection (shielded)	mm	4x1	4x1	4x1	4x1
OPTIONAL WIFI			WIFIUFO			

Notes:

Capacity data under standard conditions. Actual data will vary depending on where the equipment is installed and how it is used.
The dimensions of the electrical wiring are approximate, it should be calculated based on the conditions of the installation itself

GIAGroup HTW, a Gia Group company.