




SEALED GAS WATER HEATER NOX



Class 6 NOx

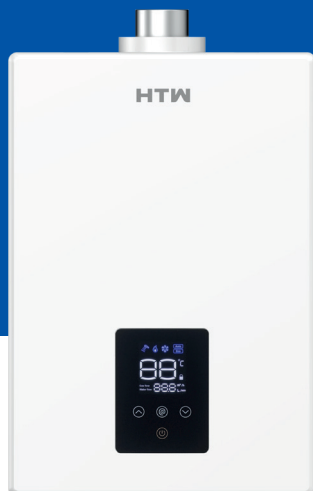

SHW big production



No pilot flame



Super slim



Compatible with solar energy



Oxygen free copper exchanger



Gas outlet kit (C13, C33, C53)

MODEL		HTW-CLE-12NOX2GN		HTW-CLE-12NOX2GLP	
EAN CODE		8435483873063		8435483873056	
Power supply	V, F, Hz	220-240V (1 Phase ~ 50Hz)			
POWER					
Input power	kW	24	24		
Useful power	kW	21	21,4 / 21,1		
Input power	kW	8	8		
Power output	kW	7,4	7,4		
Performance	%	78,1	78,1		
Declared Profile	—	M	M		
Energy classification	—	A	A		
PERFORMANCE					
Gas type	—	Gas natural G20	Butane G30 / propane G31		
Combustion	—	Sealed chamber	Sealed chamber		
Gas pressure	mbar	20	30 / 37		
Maximum gas consumption	m³/h	2,57	0,75 / 0,95		
NOx emission	mg/kWh	47	49		
FEATURES					
Maximum pressure	bar	10	10		
Minimum pressure	bar	0,2	0,2		
Flow rate (2BAR)	L/min	12	12		
Minimum flow (2BAR)	L/min	3	3		
Water temperature	°C	35~65	35~65		
Sound level	dB	61	61		
DIMENSIONS AND WEIGHT					
Net dimensions (W × H × D)	mm	345x592x168	345x592x168		
Gross dimensions (W × H × D)	mm	435x672x220	435x672x220		
Net weight	kg	12,5	12,5		
Gross weight	kg	14,5	14,5		
CONNECTIONS					
Gas connection	in.	1/2"	1/2"		
Cold water connection	in..	1/2"	1/2"		
Hot water connection	in..	1/2"	1/2"		
Ø Gas outlet	mm	Ø 60/100	Ø 60/100		
Max. gas outlet length	m	6	6		